


Dual SD Card Mobile DVR

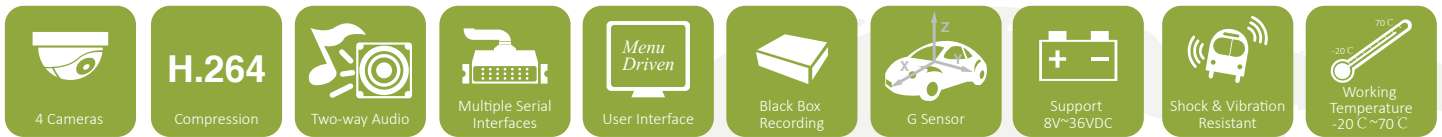

Features:

- Support GPS/GLONASS/BeiDou/3G/4G/WiFi
- 4-channel 720P live video recording, support automatic overlaying of recording
- Support video searching, playback and downloading via the platform
- OSD overlay for video recording
- Front and rear panel video/audio outputs for easy connection and configuration
- 8-36V wide voltage power supply, low power consumption
- Support the SOS, speeding, cornering, blind spot, Geo-fence, and video signal loss alerts
- Support fuel level sensor, temperature sensor, RFID, iButton, LED screen, etc.

APPLICATION



Taxi



Bus



School bus



Truck

SPECIFICATIONS

ITEM	PARAMETER	SPECIFICATIONS
Audio and video	Video input	4-channel 720P live video recording and playing
	Video output	1-channel CVBS
	Compression standard	H.264
	Image display	Support one-image and four-image display
	Audio compression	G.726
	Audio input	5-channel audio input; 4-channel AV-IN interface; 1-channel voice intercom interface; 1-channel handle interface
	Audio output	1-channel independent audio DC blocking output (CVBS aviation connector); 1-channel handle interface
	Video	Search and play back videos based on the channel, recording type, or time.
	Recording method	Simultaneously record the ACC, alert, sound, and video.
	Storage medium	2 SD cards
Communication and positioning	3G/4G	MD522S-E 2G GSM: B3(1800)/B8(900) 3G WCDMA: B1(2100)/B5(850)/B8(900) 4G FDD: B1(2100)/B3(1800)/B5(850)/B7(2600)/B8(900)/B20(800) 4G TDD: B38(2600)/B40(2300)/B41(2500) MD522S-A 3G WCDMA: B2(1900)/B4(1700/2100)/B5(850) 4G FDD: B2(1900)/B4(2300)/B12(700) MD522S-AU 2G GSM: B2(1900)/B3(1800)/B5(850)/B8(900) 3G WCDMA: B1(2100)/B2(1900)/B5(850)/B8(900) 4G FDD: B1(2100)/B2(1900)/B3(1800)/B4(2300)/B5(850)/B7(2600)/B8(900)/B28(700) 4G TDD: B40(2300)
	WiFi	802.11 b/g/n; frequency: 2.4 GHz
	GPS/GLONASS	Detect the insertion, pull-out, and short circuit of the antenna.
	Others	
Others	Dimension	145 mm x 145 mm x 54 mm
	Weight	850g
	Power input	DC: 8V–36V/A
	Power consumption	Start the host audio and video: about 6.6 W Single MCU: 45mA Connect a camera: 120–200 mA (day); 400–600 mA (night)
	Operating temperature	-20°C to 70°C



ACCESSORIES

MD522S MDVR
Power & ACC cable
I/O cable
USB cable
GPS antenna
3G/4G antenna
WiFi antenna
SD card lock key
CD download card



OPTIONAL ACCESSORIES

4 cameras
SD card
Display
Microphone & speaker
Ultrasonic fuel level sensor
RFID reader
LED display



+86(755)83462818



www.meitrack.com



info@meitrack.com



6/F, West Tower, Cafu Plaza (Sheraton Hotel), No. 5, Guihua Rd., Futian Free Trade Zone, Shenzhen, China. 518038