

# 8CH 1080P Dual SD Card Mobile DVR



## DUAL SYSTEMS: MDVR+TRACKER

Remain the advantages of GPS tracking, and add DVR functions to meet more demands of applications.

## HIGH STABILITY

Independent 4G communication. The tracker and peripherals can work properly no matter when the ACC is on or off.

## ALL-IN-ONE PLATFORM

The MS03 platform that integrates video surveillance with GPS tracking.

## VIDEO RECORDING

8-channel 1080P live video recording, support OSD overlay for video recording.



## VIDEO MANAGEMENT

Support video searching, playback and downloading via the platform.



**MD822S**

## Working Principles: Meitrack VS Other Manufacturers

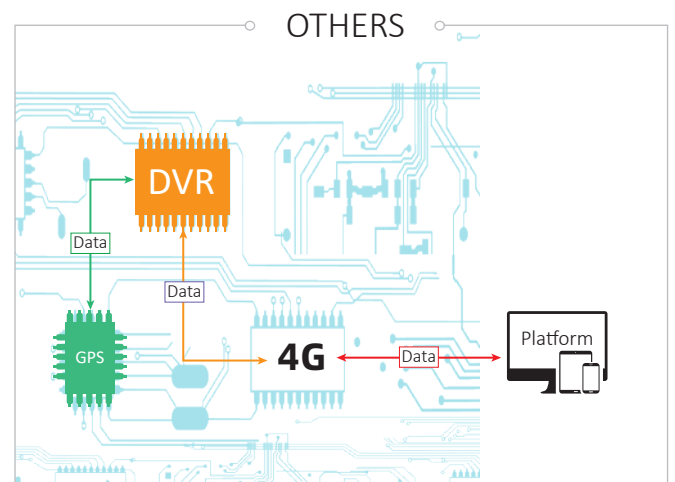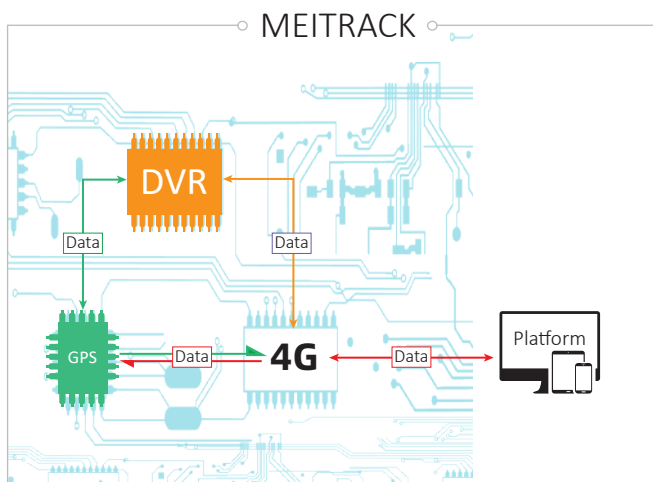

# SPECIFICATIONS

ITEM	PARAMETER	SPECIFICATIONS
Audio and video	Video input	8-channel 1080P@25FPS live video recording Support the connection of different kinds of cameras (D1/720P/1080P)
	Video output	1-channel CVBS + 1-channel VGA
	Compression standard	H.264/H.265 (optional)
	Image display	Support one-image and nine-image display
	Audio compression	G.726
	Audio input	8-channel camera Mic input. The audio function is required for the camera. 1-channel handset input, 1-channel 3.5 mm headphone jack input (GSM audio interface)
	Audio output	1-channel independent audio DC blocking output (connected to the AV-OUT interface, VGA aviation connector, or handset interface), 1-channel 3.5 mm headphone jack output (GSM audio interface)
	Video search and playback	Search and play back videos based on the channel, recording type, or time.
	Recording method	Simultaneously record the ACC, alert, sound, and video.
	Storage medium	2 SD cards
Communication and positioning	2G/3G/4G	MD822S-E GSM: B3/B8, WCDMA: B1/B8 LTE FDD: B1/B3/B7/B8/B20/B28A MD822S-A WCDMA: B2/B4/B5, LTE FDD: B2B4/B12 MD822S-AU GSM: B2/B3/B5/B8, WCDMA: B1/B2/B5/B8 LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28 LTE TDD: B40 MD822S-J WCDMA: B1/B6/B8/B19 LTE FDD: B1/B3/B8/B18/B19/B26 LTE TDD: B41 MD822S-G GSM: B2/B3/B5/B8, WCDMA: B1/B2/B4/B5/B6/B8/B19 LTE FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B25/B26/B18/B19/B20/B28 LTE TDD: B38/B39/B40/B41
	WiFi	802.11 b/g/n; frequency: 2.4 GHz; support AP/STA mode
	GPS/GLONASS	Detect the insertion, pull-out, and short circuit of the antenna
	Others	
Others	Dimension	145 mm x 145 mm x 57 mm
	Weight	818g
	Power input	DC: 9–36 V; rated input: 12V/3A
	Power consumption	Start the host audio and video: about 8W Connect 8 cameras: about 24 W in the daytime (a display connected: 29 W); about 32 W at night (a display connected: 37 W) Connect a single camera: 50–100 mA in the daytime; 200–250 mA at night
	Operating temperature	-20°C to 70°C



## ACCESSORIES

MD822S MDVR  
Power & ACC cable  
I/O cable  
USB cable  
GPS antenna  
3G/4G antenna  
WiFi antenna  
Lock key  
Cameras splitter (1 to 2)  
CD download card



## OPTIONAL ACCESSORIES

Cameras(1080P/720P/D1)  
SD card  
VGA display  
CVBS display  
Microphone & speaker  
A76 ultrasonic fuel level sensor  
RFID reader  
RFID tag  
Camera extension cable  
Handset  
iButton reader  
iButton key  
Temperature sensor  
A61 sensor Box  
A53 fuel level sensor



+86(755)83462818



www.meitrack.com



info@meitrack.com



5/F, International Internet Finance Pioneer Park, No. 1, Taohua Rd.,  
Futian Free Trade Zone, Shenzhen, China. 518038